



# *InView*<sup>TM</sup>

Industrial LED Message Displays

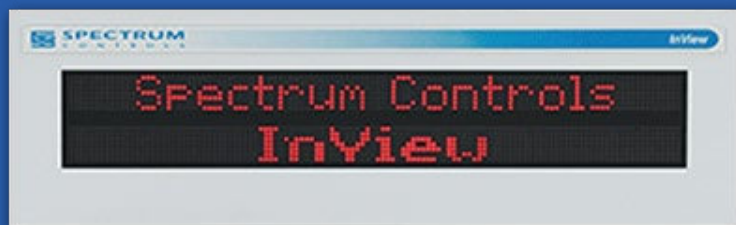

Limited-Time Pricing  
for select discontinued legacy models\*

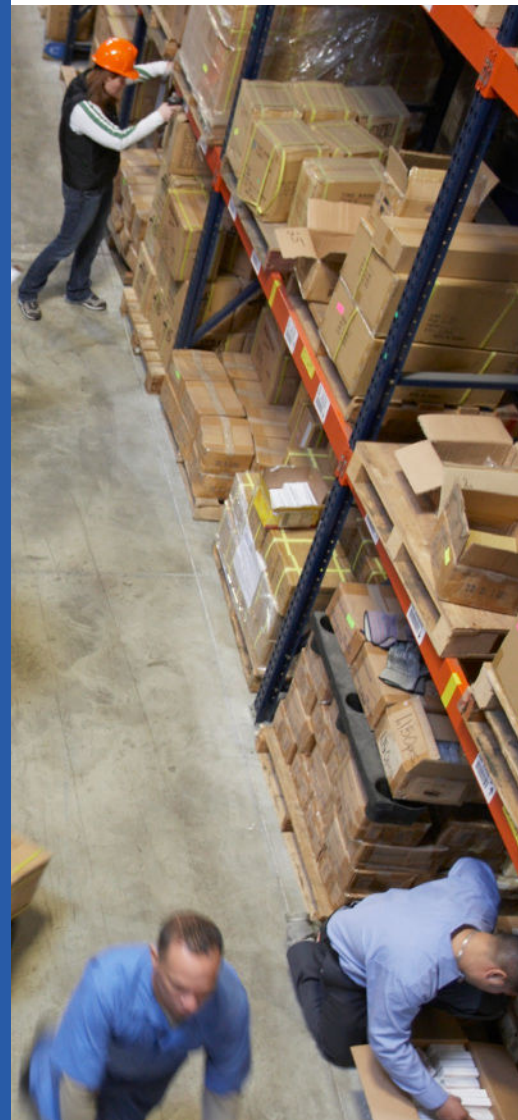

[www.spectrumcontrols.com](http://www.spectrumcontrols.com)



**SPECTRUM**  
C O N T R O L S

An **Allient** Company

\*While supplies last

# Discontinued Legacy Models

## Pricing and Specifications

- Prices shown include limited-time 20% discount
- All models listed are discontinued
- No returns / exchanges
- Rockwell Automation will continue TechConnect phone support
- Includes original warranty
- Contact your distributor to purchase

Model	Discounted List Price	Display Size	Lines	Viewing Distance	Max. Character Height	Enclosure	Voltage	Weight
P22R	\$844	12" x 2" (30 x 5.1 cm)	2	25' (7.6 m)	0.7" (per line)	NEMA Type 4 when panel mounted	24V DC	1.87 lb (.85 kg)
P42R	\$2,991	36" x 4.8" (91.4 x 12.2 cm)	1 - 2	200' (60 m)	4.8"	NEMA Type 12	120-240V AC 50/60Hz	28 lb (12.7 kg)
P44R	\$4,442	72" x 4.8" (182.9 x 12.1 cm)	1 - 2	200' (60 m)	4.8"	NEMA Type 12	120-240V AC 50/60Hz	50 lb (22.7 kg)
P72CN2	\$4,326	36" x 7.2" (91.4 x 18.3 cm)	1 - 4	350' (107 m)	7.2"	NEMA Type 4 (IP66)	120-240V AC 50/60Hz	60 lb (27.2 kg)
P74CN2	\$5,838	60" x 7.2" (152.4 x 18.3 cm)	1 - 4	350' (107 m)	7.2"	NEMA Type 4 (IP66)	120-240V AC 50/60Hz	80 lb (36.3 kg)

P##R = Red, P##C = Tricolor

Operating Temp: 0°C to 55°C (32°F to 131°F)

Storage Temp for all displays is -25°C to 70°C (-13°F to 158°F)

All displays are UL Safety, UL Hazardous Locations, CE EMC, CMIM, FCC, and UKCA EMC certified

# Comms Module Selection Guide

EtherNet/IP is the preferred deployment method. Other deployment methods are available. Each display requires a comms module for Easy Tag configuration.

## Communications Module

2706-	PENETP2-SC	PENETM2-SC	PENETM2C2-SC	PENETK2-SC
<b>P2 displays</b>	✓	•	•	•
<b>P4 displays</b>	•	✓	•	•
<b>P7 displays</b>	•	•	•	✓
<b>EtherNet/IP</b>	✓	✓	✓	✓
<b>EtherNet TCP/IP</b>	✓	✓	✓	✓
<b>Modbus TCP/IP</b>	✓	✓	✓	✓

## InView Accessories

Catalog No.	Description
**2706-NC13-SC	RS-232 operating/programming cable, 9-pin D shell to 9-pin D shell, 5 m (16.4')
**2706-PCABLE1-SC	InView program/download cable
**2706-PSW1-SC	InView messaging software with ActiveX control (only needed for Legacy Comms). Requires Windows XP

\*\*Legacy product - Accessory only available for a Legacy Comms Module

# Easy-to-Use Comms Module

**Supports Modbus TCP/IP, EtherNet/IP & EtherNet TCP/IP!**

Protect your investment with a browser-based & OS-independent communications module. With virtually every configuration just two-clicks away, our easy-to-use setup enables you to spend less time learning and more time doing.



## Configuration

Easily add, or edit, messages using one of our many built-in features to create the information you want to see.

Easy Tags functionality eliminates the need for special PLC add-on instructions.




## Diagnostics

Keep your displays up and running with easy access to your system logs, status, and reports.



## Maintenance

Take control of your solution with firmware updates, message import/export, and custom characters.

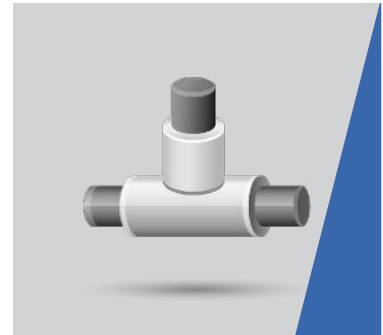

## Network

Simple network setup enables you to easily configure a static IP or a DHCP client.



Corporate Office:

1705 132nd Ave NE

Bellevue, WA 98005

Telephone : +1 (425) 746-9481

Email: [spectrum@spectrumcontrols.com](mailto:spectrum@spectrumcontrols.com)



**Technology Partner**

**A ROCKWELL AUTOMATION PARTNER**